

P-Channel -12V (D-S) Power MOSFET


Features

- 100% Avalanche Tested
- RoHS Compliant, Halogen Free, Pb-Free
- Fast switching and reverse body recovery
- AEC-Q101 Qualified
- MSL 1

Applications

- Relay driver
- Switching circuits
- High-side load switch
- High-speed line driver

| ം | |
|---|---|
| | 0 |
| | 2 |



| Absolute Maximum Ratings (T _A =25°C unless otherwise noted) | | | | | | |
|---|-----------------|-------------|------|---|--|--|
| Parameter | Symbol | Value | Unit | | | |
| Drain Source Voltage | V _{DS} | -12 | V | | | |
| Gate Source Voltage | V_{GS} | ±8 | V | | | |
| Drain Current, Continuous V _{GS} =-10V T _c =25°C | | lo | -3.5 | А | | |
| Drain Current, Pulsed (Note 1) | I _{DM} | -14 | А | | | |
| Power Dissipation T _c =25°C | | PD | 1.25 | W | | |
| Operating Junction/ Storage Temperat | TJ/ Tstg | -55 to +150 | °C | | | |

Note 1: Single pulse; $t_p \leq 1us$.

| Thermal Characteristics | | | | | | | |
|---|--------|-----|------|--|--|--|--|
| Parameter | Symbol | Max | Unit | | | | |
| Thermal Resistance Junction to Ambient (Note 2) | RthJA | 100 | °C/W | | | | |

Note 2: Device mounted on 1 square inch FR4 PCB board, with 2oz single-sided copper, in a 25°C still air environment.



| Electrical Characteristics (T _A =25°C unless otherwise noted) | | | | | | |
|--|----------------------|--|------|------|------|------|
| varameter Symbol Test Conditions | | Test Conditions | Min | Тур | Max | Unit |
| Drain Source Breakdown Voltage | V _{(BR)DSS} | V _{GS} =0V, I _D =-250µA | -12 | | | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =-12V, V _{GS} =0V | | | -1 | uA |
| Gate Threshold Voltage | $V_{\text{GS(TH)}}$ | V _{DS} =V _{GS} , I _{DS} =-250uA | -0.4 | | -1 | V |
| Gate Leakage Current | lgss | V _{GS} =±8V, V _{DS} =0V | | | ±100 | nA |
| Drain-Source On-state Resistance <i>(Note 3)</i> | Dear | V _{GS} =-4.5V, I _D =-4.4A | | 33 | 50 | mΩ |
| | R _{DS(on)} | V _{GS} =-2.5V, I _D =-3.8A | | 48 | 85 | |
| Total Gate Charge | Qg | | | 12 | | nC |
| Gate-Source Charge | Q _{gs} | V _{GS(off)} =0V, V _{GS(on)} =-4.5V, V _{DS} =-8V, I _D =-3.5A | | 1.5 | | |
| Gate-Drain Charge | Q _{gd} | | | 3 | | |
| Turn-on Delay Time | t _{d(on)} | | | 11.3 | | |
| Turn-on Rise Time | tr | V _{GS} =-10V, V _{DD} =-10V, | | 18.1 | | |
| Turn-off Delay Time | t _{d(off)} | R _G =3Ω, I _D =-1.0A | | 32.4 | | ns |
| Turn-off Fall Time | t _f | | | 38.1 | | |
| Input Capacitance | Ciss | | | 638 | | |
| Output Capacitance | Coss | V _{GS=} 0V, V _{DS} =-12V, f=1MHz | | 238 | | pF |
| Reverse Transfer Capacitance | Crss | | | 221 | | |

| Reverse Diode Characteristics (T _A =25°C unless otherwise noted) | | | | | | |
|---|--|-----------------|------|------|------|------|
| Parameter | Symbol | Test Conditions | Min. | Тур. | Max. | Unit |
| Forward Current, Continuous | Isd | Tc=25°C | | | -3.5 | А |
| Diode Forward Voltage (Note 3) | V _{SD} I _F =-1A, V _{GS} =0V | | | -0.8 | -1.2 | V |

Note 3: Pulse test; pulse width \leq 380µs, duty cycle \leq 1%.



AGMP1314 GOOD-ARK Electronics

3.0

Typical Characteristics Curves (T_A = 25°C unless otherwise noted)

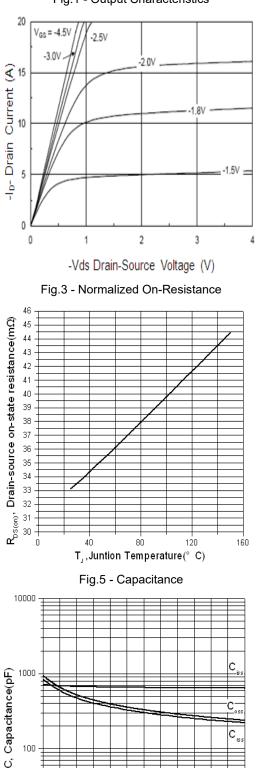


Fig.1 - Output Characteristics

-15 -l_o, Drain-to-Source Current (A) ²⁰ 6- ³¹ Ta=25"

0. 0.0

0.5

1.0


1.5


-V_{GS} Gate-Source Voltage (V)

2.0

2.5

Fig.2 - Transfer Characteristics

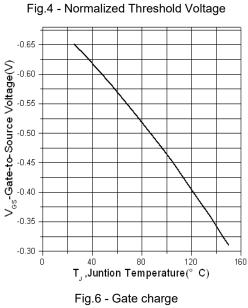

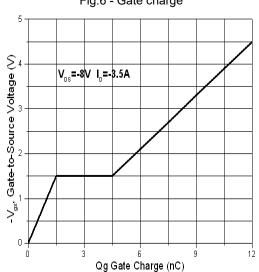

-6

-4

-10

-8

-12



Typical Characteristics Curves (T_A = 25°C unless otherwise noted)

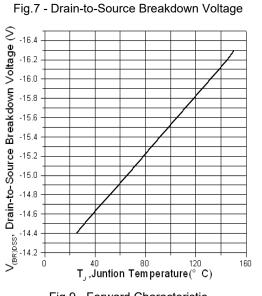


Fig.9 - Forward Characteristic



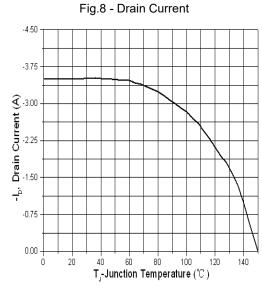


Fig.10 - Safe Operating Area






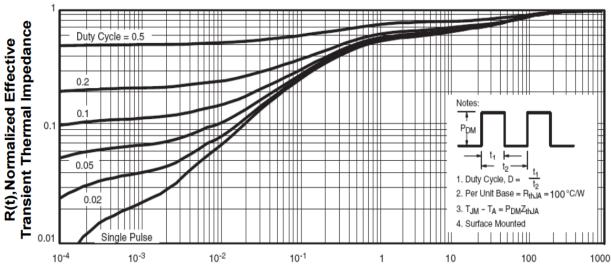

Package Outline Dimensions (Unit: millimeters)


SOT-23

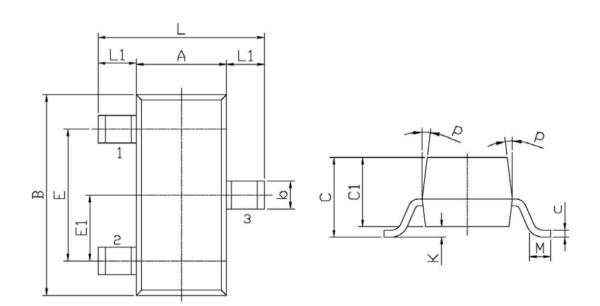

| Symbol | Dimensions in Millimeter | | Symbol | Dimensions in Millimeter | | |
|--------|-----------------------------|------|--------|-----------------------------|------|--|
| _ | Min | Max | - | Min | Max | |
| L | 2.2 | 2.7 | С | 1.30 | Max | |
| L1 | 0.45 | 0.65 | C1 | 0.90 | 1.20 | |
| A | 1.15 | 1.50 | С | 0.05 | 0.20 | |
| В | 2.70 | 3.10 | K | 0 | 0.10 | |
| E | 1.70 | 2.10 | М | 0.20 Min | | |
| E1 | 0.85 | 1.05 | Р | 7° | | |
| b | 0.35 | 0.55 | | | | |



Marking Outline

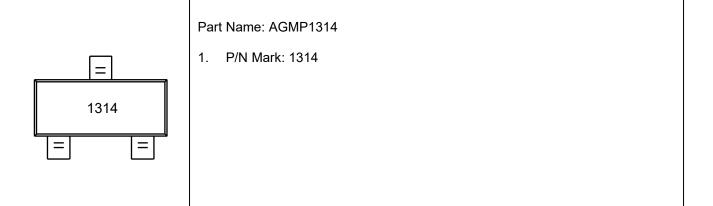



Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd.or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any thirdparty's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (http://www.goodark.com)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.